



**HYUNDAI**  
W E L D I N G

Rev. 00

---

# **S-7018.G**

COVERED ARC WELDING ELECTRODE  
FOR HIGHLY EFFICIENT WELDING  
OF 490MPa CLASS HIGH TENSILE STEEL

---

***HYUNDAI WELDING CO., LTD.***



## ❖ **Specification**

*AWS A5.1*

**E7018**

*JIS Z3211*

**E4918**

*EN ISO 2560-A*

**E42 3 B 3 2**

## ❖ **Applications**

Structures using 490MPa class high tensile steel, such as bridges, building, rolling stock and machines.

## ❖ **Characteristics on Usage**

S-7018.G is an iron powder low hydrogen type electrode of high efficiency used for welding 490MPa class high tensile steel. Its usability is good with direct current applications as well as alternating current applications and easy to weld in all position.

## ❖ **Note on Usage**


1. Dry the electrodes at 300℃ ~350℃ for 60 minutes before use.
2. Store the electrodes at 100~ 150℃ after drying for keeping them away from moisture.
3. Keep the arc as short as possible, and avoid large width weaving.
4. Adopt back step method or strike the arc on a small steel plate prepared for this particular purpose to prevent blowholes at the arc starting.
5. Use the wind screen against strong wind.



## Mechanical Properties & Chemical Compositions of All Weld Metal

### ❖ Welding Conditions

Method by AWS Spec.

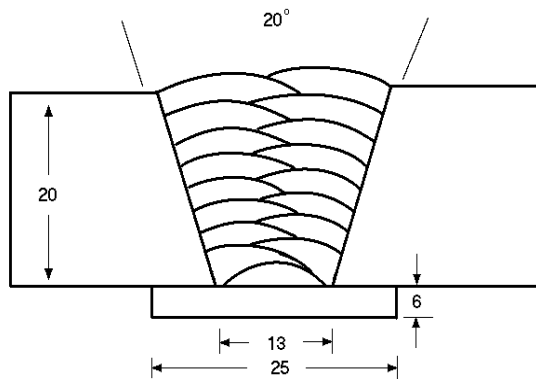

Diameter (mm)	: 4.0 x 400
Amp./ Volt.	: 160 / 23~ 24
Interpass Temp. (°C)	: 80 ~ 130
Polarity	: DC +

[ Joint Preparation & Layer Details ]

### ❖ Mechanical Property of All Weld Metal

Consumable	Tensile test			CVN Impact Test (Joule)
	YS (MPa)	TS (MPa)	EL (%)	- 30°C
S-7018.G	503	593	30.0	111
AWS Spec.	≥ 400	≥ 490	≥ 22	≥ 27 at -30°C

### ❖ Chemical Composition of All Weld Metal(wt%)

Consumable	Chemical Composition				
	C	Si	Mn	P	S
S-7018.G	0.07	0.41	1.27	0.016	0.007
AWS Spec.	≤0.15	≤0.75	≤1.60	≤0.035	≤0.035

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



## **Weldability & Welding Efficiency Test**

### ❖ **Weldability**

Item \ Division	Flat position	Vertical position
Arc stability	Good	Good
Melting rate	Excellent	Excellent
Deposition rate	Excellent	Excellent
Resistance of spatter occurrence	Excellent	Excellent
Bead appearance	Good	Good
Slag detachability	Good	Good

### ❖ **Test Conditions of Deposition Efficiency**

Consumable	Base Metal		Welding conditions		
	Specification	Dimension (mm)	Amp. (A)	Welding speed (mm/min)	Position
<b>S-7018.G (4.0mm x 400)</b>	ASTM A36	300 X 100 X 12	160	200	Flat

### ❖ **Results of Deposition Efficiency Test**

Consumable	Deposition efficiency(%)	
	For electrode	For core wire
<b>S-7018.G (4.0 mm x 400)</b>	65 ~ 70	115 ~ 125

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.



## Diffusible Hydrogen Content

### ❖ *Welding Conditions*

consumable	: S-7018.G	Amp.(A) / Volts(V)	: 170Amp.
Diameter(mm)	: 4.0 x 400	Stick-Out(mm)	: 20~ 25
Flow Rate(ℓ /min.)	: -	Welding Speed	: 60 CPM
Welding Position	: 1G	Current Type & Polarity	: DC+

### ❖ *Hydrogen Analysis Using Gas Chromatography Method*

Hydrogen Evolution Time	: 72 hrs	Analysis Temp.	: 25 °C
Evolution Temp.	: 25 °C	Exposure Condition	: 80%RH- 25 °C
Barometric Pressure	: 780 mm- Hg		

### ❖ *Result (ml/100g Weld Metal)*

X1	X2	X3	X4
6.3	7.7	8.2	7.3

**Average Hydrogen Content 6.8 ml/100g Weld Metal**



**Size Available and recommended Current & Approval**

**❖ Sizes Available and Recommended Current**

Diameter (mm)		2.6	3.2	4.0	5.0	6.0
Length (mm)		350	350 400	400 450	400 450	450
Recommended current range ( AC or DC+ Amp.)	Flat position	60 ~ 90	90 ~ 140	130 ~ 190	180 ~ 240	250 ~ 310
	Vertical & Overhead position	50 ~ 80	80 ~ 120	120 ~ 170	150 ~ 200	-

**❖ Authorized Approval Details**

Classification	Dia. (mm)	Welding position	Grade						
			KR	ABS	LR	BV	DNV	GL	NK
E7018	2.6 ~ 5.0	All	3H10, 3YH10	3H10 , 3Y	3, 3YH15	3YHH	3YH10	3YH10	KMW 53HH
	6.0	Flat							

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.